

### ULTRASHADE FABRIC FEATURES

Stitched with Gore® TENARA®, UV stabilized thread that will not fade or deteriorate

Mildew and rot resistant

Maintain color in all weather conditions

Lockstitch sewing technique that prevents frays or unraveling

Provide up to 96% UV Block and 95% shade with temperature reductions of up to 30 degrees

Meet or exceed ASTM E84 testing, NFPA 701 Large Scale testing

80% water repellent

Porous fabric provides free airflow, allowing hot air to escape

100% recyclable

### STRUCTURAL INFORMATION

Engineered to withstand wind gusts up to 90 mph with fabric and up to 150 mph with fabric removed

Welds are performed by AWS welders in accordance to AISC standards.

Structures are free of sharp edges and corners.

Galvanized cables (aircraft quality)

Pre-galvanized structural steel Flo-Coat tubing


Steel and bolts meet ASTM guidelines (stainless steel or galvanized).

A500 carbon steel tubing may be used for larger structures

All steel members have TGIC polyester powder-coat

Zinc rich primer is applied with a 1-2 mil thickness

Standard Powder-Coat

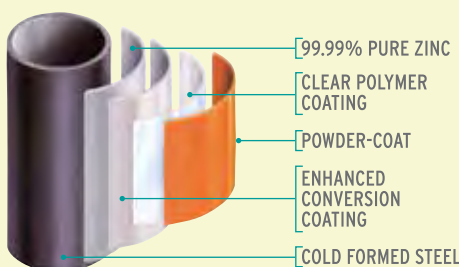

### FABRIC COLOR OPTIONS




**WHITE**  
Shade Factor 57%  
UV Factor 86%

**ARIZONA**  
Shade Factor 84%  
UV Factor 92%

**DESERT SAND**  
Shade Factor 80%  
UV Factor 92%

**YELLOW**  
Shade Factor 70%  
UV Factor 94%




**ZESTY LIME**  
Shade Factor 84%  
UV Factor 92%

**OLIVE**  
Shade Factor 89%  
UV Factor 95%

**RAIN FOREST GREEN**  
Shade Factor 89%  
UV Factor 96%

**TURQUOISE**  
Shade Factor 83%  
UV Factor 92%




**LAGUNA BLUE**  
Shade Factor 91%  
UV Factor 96%

**ROYAL BLUE**  
Shade Factor 86%  
UV Factor 94%

**NAVY BLUE**  
Shade Factor 90%  
UV Factor 94%

**ELECTRIC PURPLE**  
Shade Factor 83%  
UV Factor 91%




**TERRACOTTA**  
Shade Factor 84%  
UV Factor 90%

**RED**  
Shade Factor 86%  
UV Factor 80%

**CINNAMON**  
Shade Factor 92%  
UV Factor 94%

**CHOCOLATE**  
Shade Factor 92%  
UV Factor 93%



**SILVER**  
Shade Factor 88%  
UV Factor 93%

**BLACK**  
Shade Factor 95%  
UV Factor 96%



### LIMITED WARRANTY

UltraShade™ by UltraSite™, warrants that the shade structure sold will be free from defects in materials under intended use for a period of 10 years from the date of delivery (structure & fabric).

### POWDER-COAT COLOR OPTIONS



**TRAFFIC WHITE**  
RAL 9016

**BEIGE**  
RAL 1001

**ZINC YELLOW**  
RAL 1018

**MINT GREEN**  
RAL 6029

**WATER BLUE**  
RAL 5021



**PINE GREEN**  
RAL 6028

**BRILLIANT BLUE**  
RAL 5007

**SIGNAL BLUE**  
RAL 5005

**TOMATO RED**  
RAL 3013

**TRAFFIC RED**  
RAL 3020



**CLARET VIOLET**  
RAL 4004

**COPPER BROWN**  
RAL 8004

**TERRA BROWN**  
RAL 8028

**DUSTY GREY**  
RAL 7037

**JET BLACK**  
RAL 9005